


Boekel Scientific offers a wide variety of Dry Bath Incubators designed to accommodate an assortment of interchangeable Heating Block Modules. These reliable and economical products are ideal for a variety of applications including restriction digests, denaturing DNA, BUN, melting agar, coagulation studies, *in situ* hybridization and Hot Start PCR. Dry Bath Incubators have a two-year warranty.

Digital Dry Bath Incubators



Digital Dry Baths Two Block Model 113002

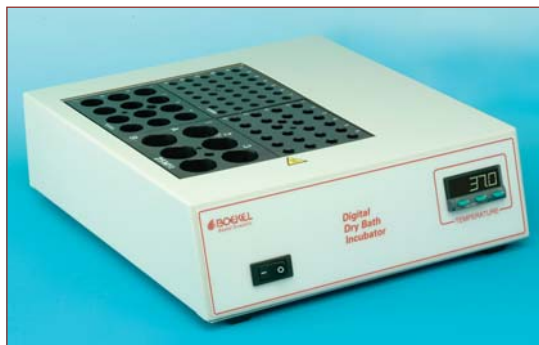

Digital Dry Bath Four Block Model 113004

- Two and four block capacity models
- Rapid heat up and superb stability
- PID Microprocessor controlled temperature selection
- Large LED display
- Blocks are interchangeable between Analog and Digital models
- "Set it and forget it" convenience
- Superb temperature stability

Supplied with Block Extractor

Digital Dry Baths Specifications			
Two Block Capacity		Model 113002	Model 113002-2
Dimensions	in	8.0 in x 9.8 in x 3.5 in	
W x L x H	cm	20.3 cm x 24.9 cm x 8.9 cm	
Net Weight		5.0 lbs	
Shipping Weight		5.5 lbs (2.3 kg)	
Temperature Range		0.1°C up to 120°C	
Uniformity		+/- 0.25°C @ 37°C	
Stability		+/- 0.2°C from 37 to 100°C	
Electrical		115 VAC, 50/60 Hz, 200 W	230 VAC, 50/60 Hz, 200 W (CE)
Four Block Capacity		Model 113004	Model 113004-2
Dimensions	in	10.2 in x 11.3 in x 3.5 in	
W x L x H	cm	26.0 cm x 28.6 cm x 8.9 cm	
Net Weight		6.0 lbs	
Shipping Weight		6.5 lbs (2.7 kg)	
Temperature Range		0.1°C up to 120°C	
Uniformity		+/- 0.25°C @ 37°C	
Stability		+/- 0.2°C from 37 to 100°C	
Electrical		115 VAC, 50/60 Hz, 380 W	230 VAC, 50/60 Hz, 380 W (CE)